
FBHE Series
Chip Ferrite Bead High Current Type
Size 0805


Dimensions: [mm]

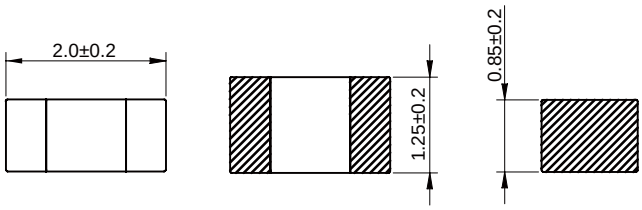


Land Patter


Electrical Properties:


Typical Electrical Characteristics:

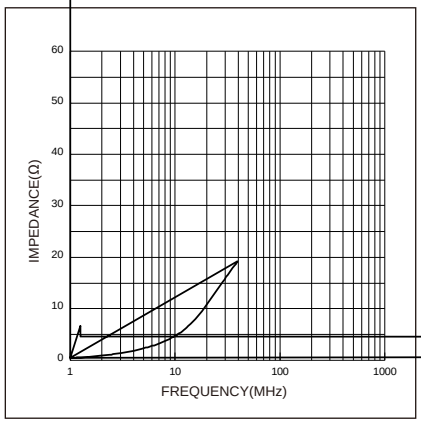

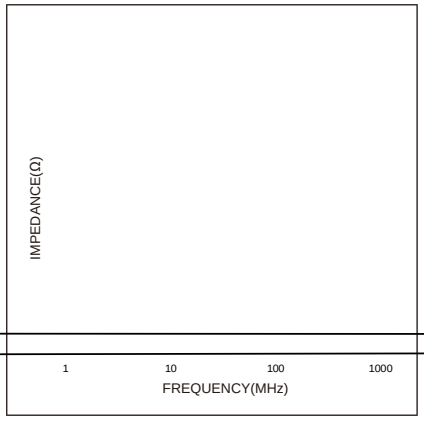



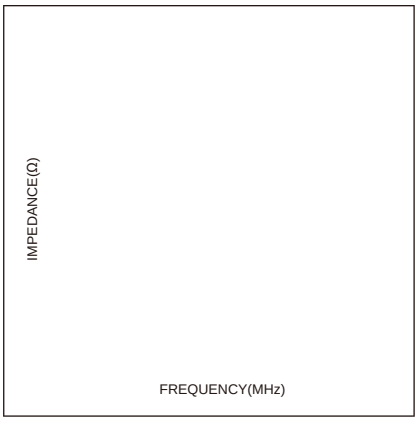


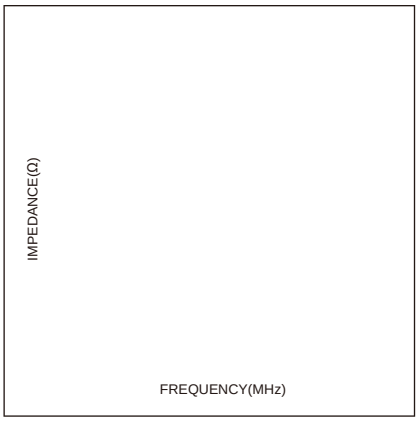





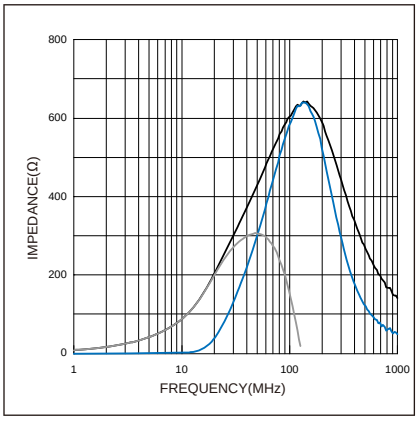


800
600
400
200
0
IMPEDANCE(Ω)
1
10
100
1000
FREQUENCY(MHz)


Soldering Reflow:

Packaging Information:

Tape Dimension:


A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)				
1.3±0.1	2.1±0.1	1.5±0.2	4.0±0.1	4.0±0.1	8.0±0.3	0.95±0.1	1. 5±0.1	0.95±0.05

Peel force of top cover tape:

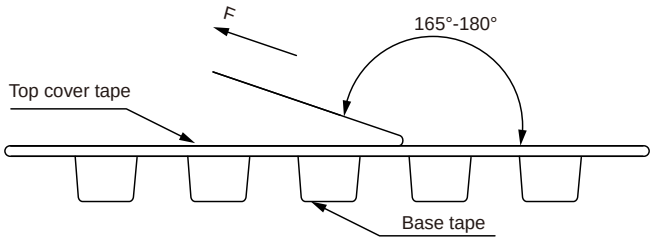


The peel force of top cover tape shall be between 0.14 to 0.58 N

Reel Dimension：[mm]

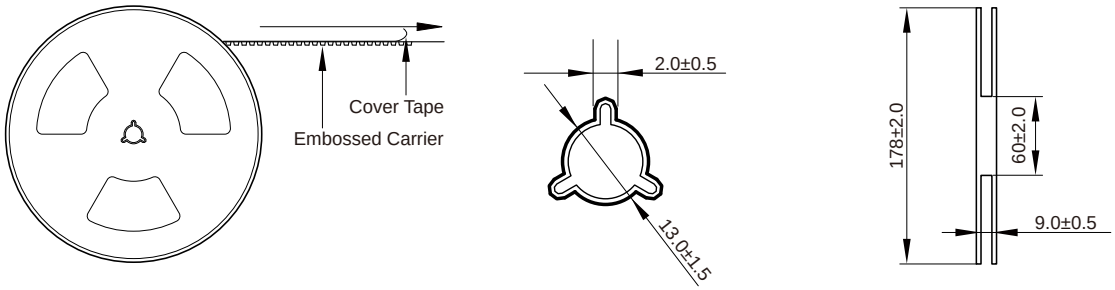

Packaging Quantity:



4000 Pcs/Reel	5 Reel /Inner box(20K Pcs)	8 Inner box/Carton box(160K Pcs)

Cautions and Warnings:

Storage Conditions：

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components.The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does.As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.