FBHE Series

SMD Suppression Ferrite Bead
Size 1206



CHARACTERISTICS


- Monolithic inorganic material construc on.
- Closed magne c circuit avoids crosstalk.
- Suitable for reflow soldering.
- Available in various sizes.
- Quan ty: 3000pcs

APPLICATION

- Data lines and low power lines
- Connec on between digital and analog circuit

Dimensions: [mm]

Land Pattern: [mm]

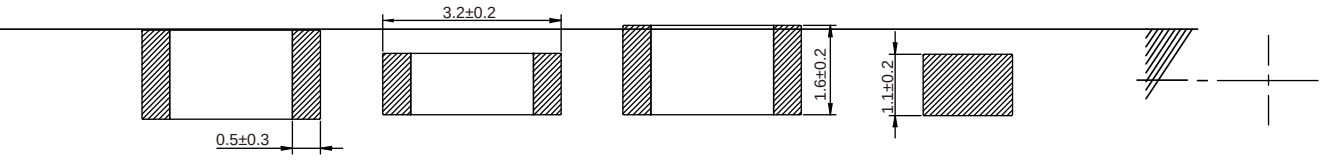


Electrical Properties:


Part No	Impedance @100MHz (Ω)	Tolerance	DCR (max) (Ω)	Temperature Rise Current (max) (mA)


Opera ng Temperature: -55℃ ~ +125℃
Temperature rise current the actual value of DC current when the temperature rise is ΔT40℃


KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com


Impedance & Frequency Characteristics:

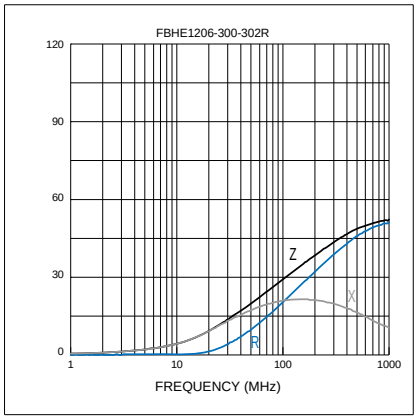


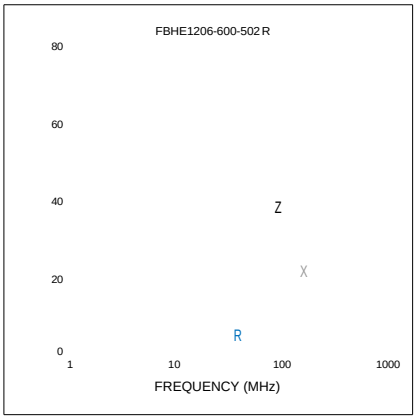


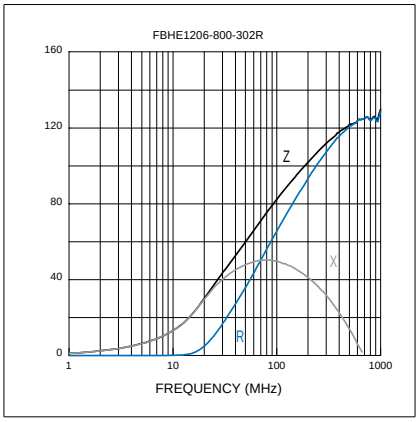


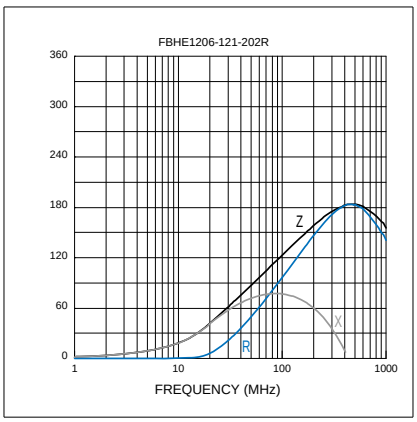


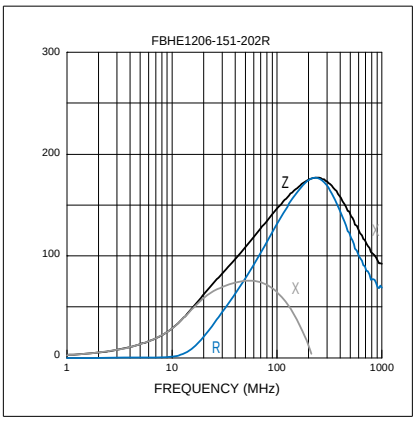


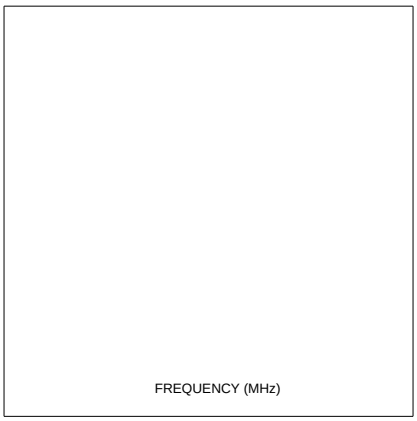

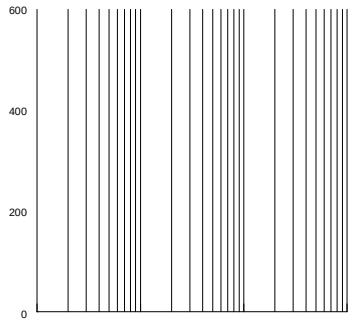

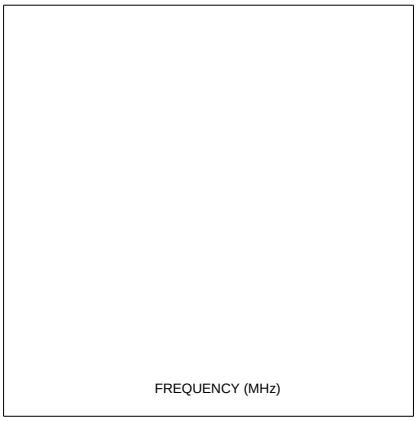

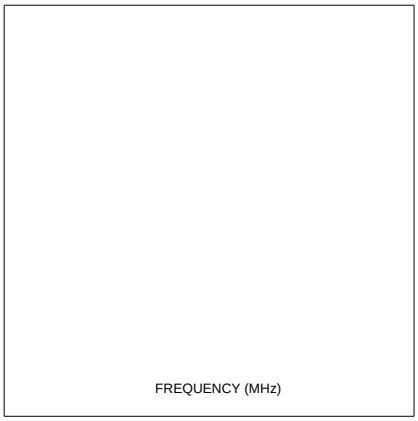

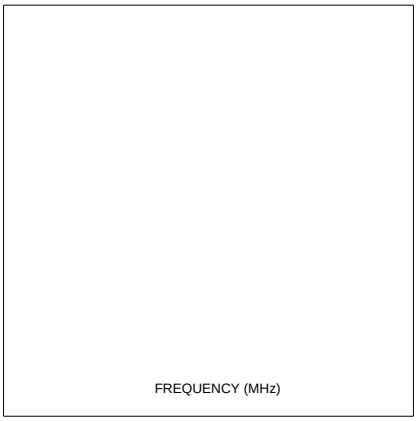

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com