

SMD Power Inductor
Size 1870


-
-
-
-
-
-
-
-

-
- HVAC
-
- Audio subsystem
- Digital instrument cluster
-

Dimensions: [mm]








Land Pattern: [mm]

Electrical Properties:

	Tolerance
	±20%
	±20%
123	±20%
70	±20%
	±20%
62	±20%
	±20%
	±20%
	±20%
	±20%
39	±20%
31	±20%
29	±20%
27	±20%
23	±20%
20	±20%

Typical Electrical Characteristics:

Soldering Reflow:

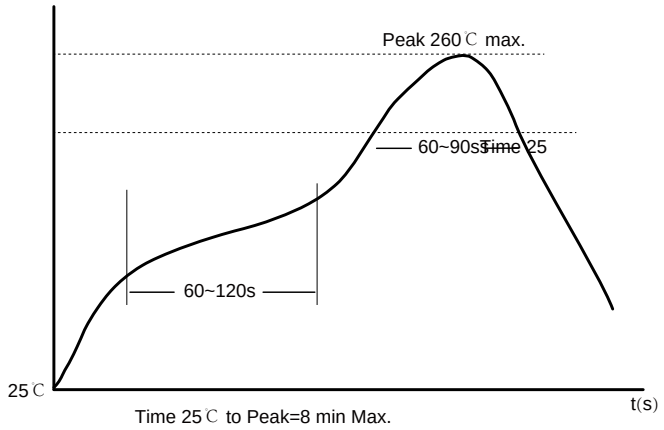

Preheat condition: 150 ~200℃/ 60~120 sec.

Allowed time above 217℃: 60~90 sec.


Max temperature: 260℃.

Allowed Reflow time: 2x max.

Packaging Information:

Tape Dimension:

Peel force of top cover tape:

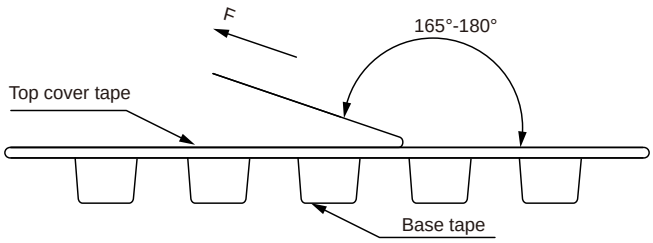


The peel force of top cover tape shall be between 0.1 to 1.3 N

Product Marking:

Marking	KH+Printing(Inductance+period)

Reel Dimension：[mm]

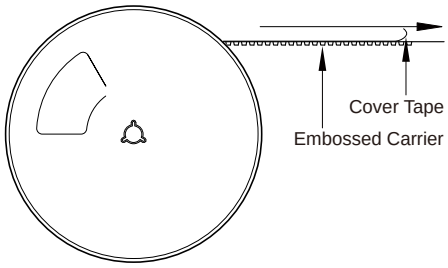

Packaging Quantity: