

SMD Power Indutor
Size 3020




-
-
- , ,
-
-
-
-
-
-
- ,
-

Dimensions: [mm]

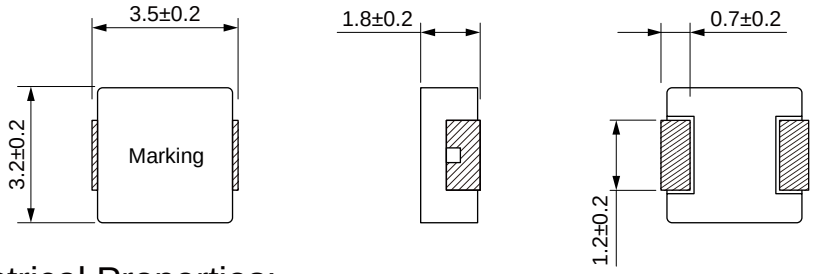


Land Pattern: [mm]




Electrical Properties:


Part No	Inductance @ 100KHz/1V	Tolerance	Temperature Rise Current Typ.	Current Typ.	DC Resistance Typ.	DC Resistance Max.


Saturation Current will cause L to drop approximately 30%
Temperature Rise Current: The actual value of DC current when the temperature rise is △T=40°C

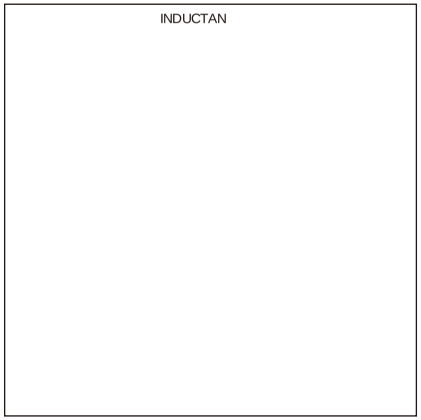
INDUCTAN

Typical Electrical Characteristics:

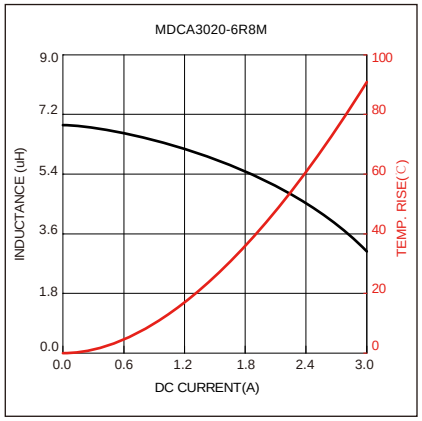

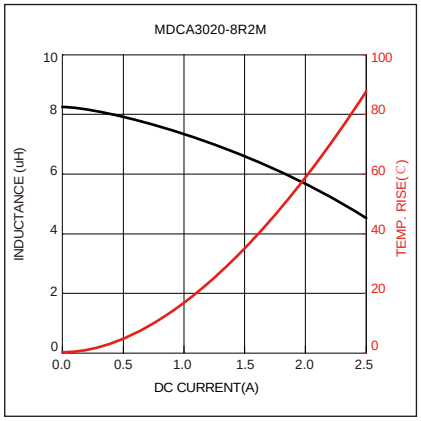

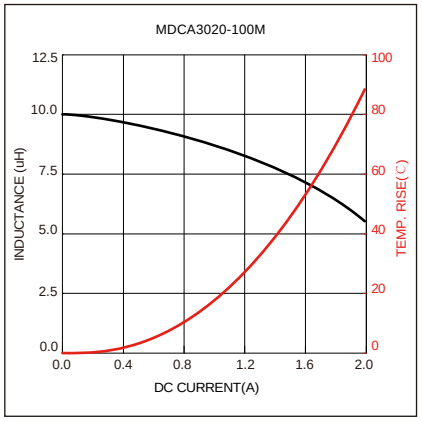


Soldering Reflow:

Packaging Information:


Tape Dimension:

Peel force of top cover tape:

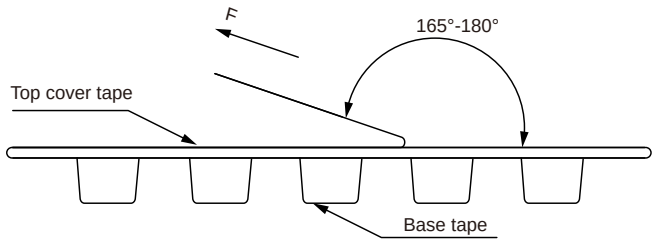


The peel force of top cover tape shall be between 0.1 to 1.3 N

Reel Dimension：[mm]

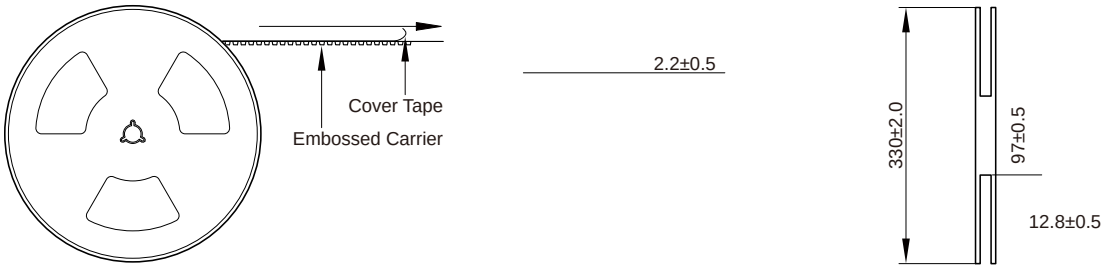

Packaging Quantity:



3000 Pcs/Reel

3 Reel /Inner box(9000 Pcs)

3 Inner box/Carton box(27K Pcs)

Cautions and Warnings:

Storage Conditions：

Operation Instructions: