
MDTA Series




FEATURES

- Flat wire coil for low copper losses
- Composoite core material allows high satura on currents
- Very low acous c noise and very low leakage flux noise
- High current capability and handles high transient current spikes
- AEC-Q200 qualified
- Opera ng temperature -55 to +155℃(Including self - temperature rise)
- Quan ty: 800pcs

APPLICATION

- DC/DC converters for entertainment/naviga on systems
- Noise suppression for motors: windshield wipers / power seats/ power mirrors / hea ng and ven la on blowers / HID ligh ng
- LED drivers

[illegible]	±20%	24.0	21.
[illegible]	±20%	23.0	20.
[illegible]	±20%	22.0	18.
[illegible]	±20%	19.5	17.
[illegible]	±20%	18.5	16.
2.20	±20%	16.0	13.
3.30	±20%	12.5	11.
4.30	±20%	11.0	9.0
4.70	±20%	10.5	8.5

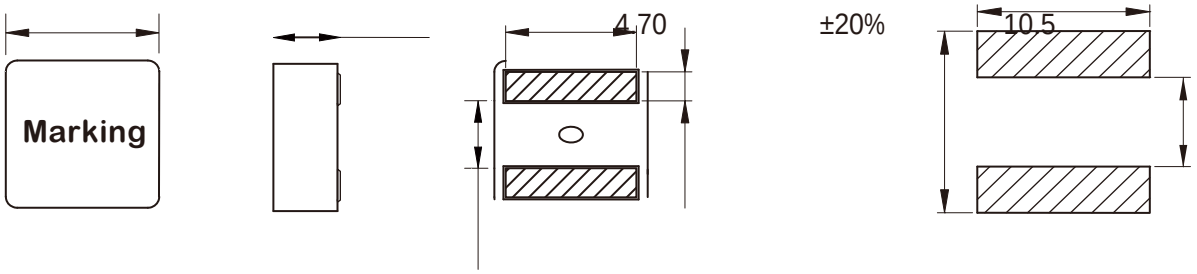

	(A)		
	16.0	4.18	5.3±0.3
	15.0	4.52	5.3±0.3
	14.0	5.83	5.3±0.3
	13.0	6.30	5.3±0.3
	12.0	7.10	5.3±0.3
	10.0	8.50	5.2±0.3
	8.5	12.5	5.2±0.3
	7.0	16.2	5.2±0.3
	6.5	18.4	5.2±0.3

:

