

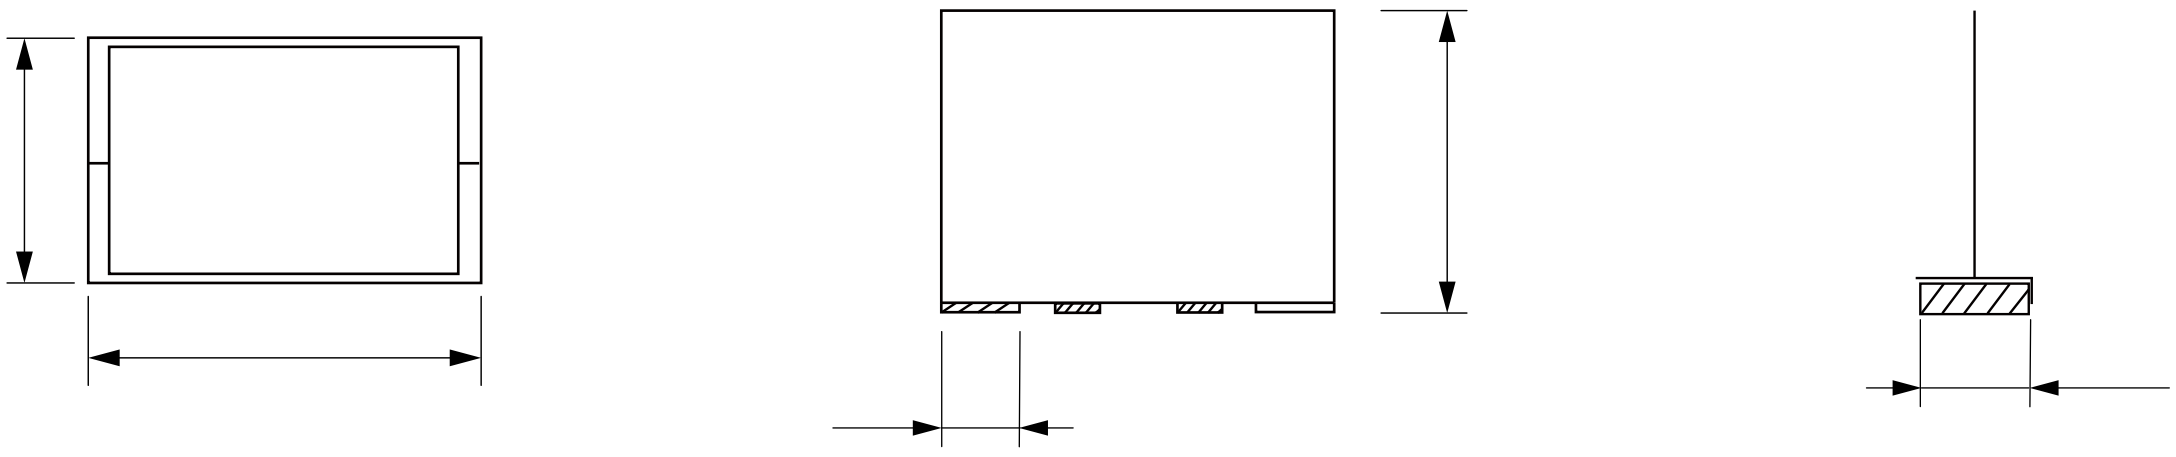

| Series | A | B | C | D<br>(pin1&4) | D<br>(pin2&3) | E1 | E2 |
|---|---|---|---|---|---|---|---|
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

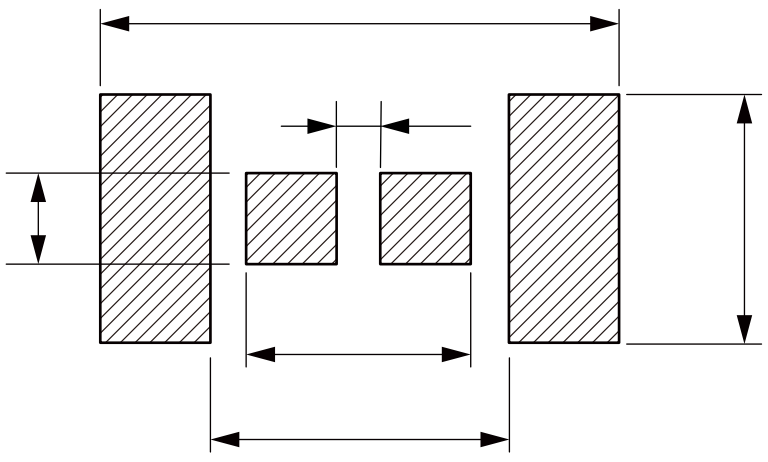



| Series | a | b | c | d | e | f |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | | | | | |
| | | | | | | |

| Part No | Inductance @ 500KHz/0.25V (nH) | Tolerance | Temperature Rise Current Typ. (A) 1-4 | Current Typ. (A) 1-4 | DC Resistance ±10% 1-4 | DC Resistance ±10% 2-3 |
|---|---|---|---|---|---|---|
| | | | | | | |

| Part No | Inductance @ 100KHz/1V (nH) | Tolerance | Temperature Rise Current Typ. (A) 1-4 | Current Typ. (A) 1-4 | DC Resistance ±10% 1-4 | DC Resistance ±10% 2-3 |
|---|---|---|---|---|---|---|
| | | | | | | |

| Part No | Inductance @ 100KHz/0.1V (nH) | Tolerance | Temperature Rise Current Typ. (A) 1-4 | Current Typ. (A) 1-4 | DC Resistance ±10% 1-4 | DC Resistance ±10% 2-3 |
|---|---|---|---|---|---|---|
| | | | | | | |

△

:

| | |
|---|---|
| Marking | Printing (Inductance) |

:

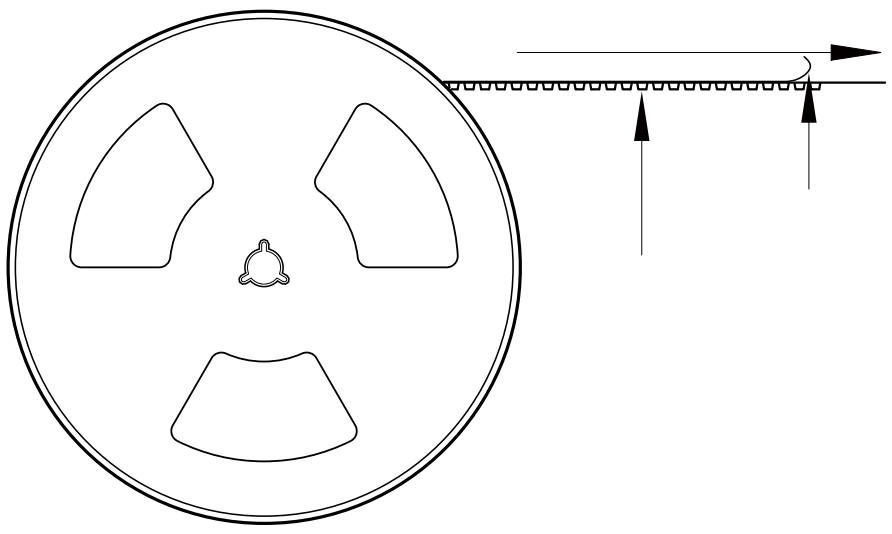



:

●

●

●

●

●

●

●

●